


Sight glasses with a flange at each end and two toughened glass windows mounted on opposing sides. The flanges are drilled and conform to ANSI - 150 lbs, 300 lbs. Details of the variety of body materials and glass qualities available can taken from the following lists.

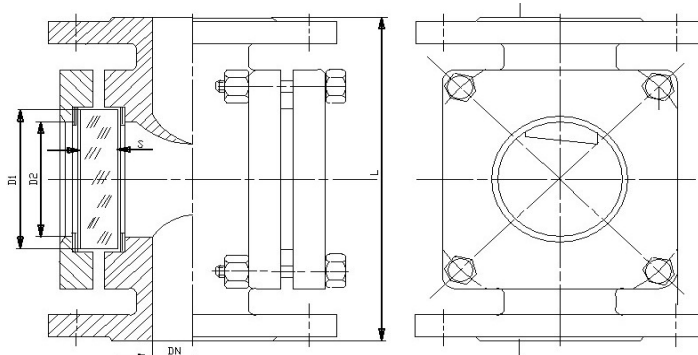

Bestell-Nr. Order-No.	Zoll Inch	Baulänge L Overall length	Sicht-Ø D2 View port dia	Glas-Ø D1 Dia of glass	150 lbs	300 lbs	Gewicht Kg Weight Kg
					Glasdicke S Glass Thickn.	Glasdicke S Glass Thickn.	
110*-A-01	1/2"	130	32	45	10	10	2,800
110*-A-02	3/4"	150	32	45	10	10	4,200
110*-A-03	1"	160	48	63	10	15	4,600
110*-A-15	1 1/4"	180	48	63***	10	15	6,850
110*-A-04	1 1/2"	200	65	80	12	20	8,900
110*-A-05	2"	230	80	100	15	25	12,650
110*-A-10	2 1/2"	290	80	100	15	25	19,900
110*-A-06	3"	310	100	125	20	30	21,800
110*-A-07	4"	350	125	150	25	35	31,400
110*-A-08	5"	400	150	175	25	a.A.	47,000
110*-A-09	6"	480	175	200	30**	a.A.	56,000
110*-A-11	8"	600	175	200	30**	a.A.	70,000
110*-A-12	10"	730	175	200	30**	a.A.	85,000

* Bei Bestellung bitte angeben: GG = Grauguß, GS = Stahlguß, VA = Edelstahlguß

** nur Borosilikatglas / only Borosilateglass

Glassorten: Kalk-Natron Glas DIN 8902 (150 °C), Borosilikatglas DIN 7080 (280 °C)

*** bei Grauguß / with GG Ø80 x 12 mm

* When ordering please mention: GG = Grey cast iron, GS = Cast steel, VA = Stainless steel

Glass qualities: Soda-Lime Glass Din 8902 (150°C), Borosilateglass DIN 708 (280°C)

Einzelteile Components		Werkstoff - Tabelle Index of Material		
		Ausführung Grauguß (max. 16 bar) Version Grey cast iron	Ausführung Stahlguß Version Cast steel	Ausführung Edelstahlguß Version Stainless steel
Gehäuse	Body	GG 25 (EN-GJL-250)	GS-C 25 (1.0619 / GP240GH)	1.4408
Deckel	Frames	GG 25 / S235JRG2	GSC 25 / S235JRG2	1.4301
Schrauben	Screws	4.6 / 5.6vz	4.6 / 5.6vz	A4-70
Schauglas	Sight glass	Natronkalkglas DIN 8902 (150°C) / Soda-Lime-Glass DIN 8902 (150°C)		
		Borosilikatglas DIN 7080 (280 °C) / Borosilateglass DIN 7080 (280 °C)		
Dichtungen	Gaskets	Graphit oder nach Wunsch / Graphite or as requested		